

CT 100

Great Productivity



Huge solution tank capacity in minimum external space



Extensive running time (Large battery compartment)



Solution control with automatic stop (Solenoid valve)



Brush control with automatic "delayed" stop



High Performance

PATENTED



SLS (Self Levelling System) automatic brush pressure control



Exclusive squeegee system assures high performance at low cost



High quality and performance vacuum motor



CT 100



Ergonomics, User Friendly



Great manoeuvrability thanks to an optimum weight distribution



Solution tank discharge hose



Great visibility whilst working



Recovery tank discharge point and hose at maximum height



Designed to assure minimum noise levels



Solution tank can be tilted



Easy to use control panel



External battery charger plug



Solution tank level indicator



On board charger can be fitted also at a later stage



Battery level indicator



CT 100



Low Maintenance Costs



Inlet and outlet filters for maximum solution tank protection



AFS (Anti Foam System)



Brush replacement without tools



Squeegee blade can be used on 4 sides before replacement



Squeegee assembly and blades replacement without tools



Easy access to internal compartments

Robust Construction



Tanks and surrounding body in high density polyethylene



Oil bath reduction gear box



Brush head designed to absorb harsh impact



Squeegee system designed to absorb harsh impact




Panel control switches protected against water and humidity



Technical data		CT100 BT 60	CT100 BT 70	CT100 BT 85
Scrubbing width	mm	600	700	850
Suction width	mm	950	950	950
Productivity (at max speed)	m ² /h	2700	3150	3825
Number of brushes		2 (disc)	2 (disc)	2 (disc)
Solution tank capacity	l	100	100	100
Recovery tank capacity	l	110	110	110
Power supply		24V (4x6V)	24V (4x6V)	24V (4x6V)
Max speed	Km/h	4,5 (electric)	4,5 (electric)	4,5 (electric)
Weight (net)	Kg	162	170	173
Dimensions (LxWxH)	mm	1572x670x1075	1596x744x1075	1641x880x1075

CT 100

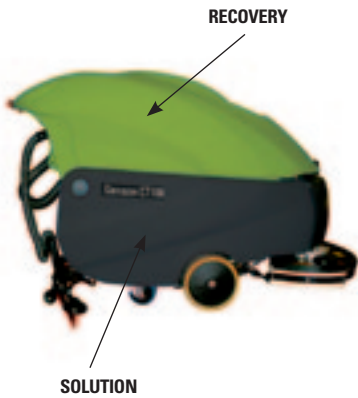

Huge tank capacity in minimum external space

100 - 110 litre capacity tanks make this model very unique in its category.



Solution control with automatic stop

Saves water and save chemicals. Solution flow stops and starts upon brush command.




Extensive running time

Extremely large battery compartment allows batteries of up to 320Ah/5h (5,5h running time).



SLS (Self Levelling System) Automatic brush pressure control

Constant brush pressure with immediate reaction. Avoids also excessive brush and actuator wear.

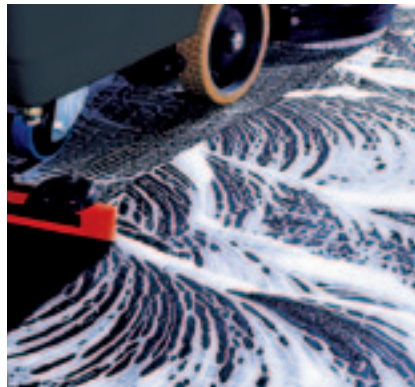

Exclusive squeegee system assures high performance at low cost

Incomparable drying results even on the most difficult surfaces thanks to a very unique design.



Recovery tank can be tilted

Easy to rinse and clean thanks also to smooth internal finishes.



IPC