

# CT 230

[NEW]

## Great Productivity



Huge solution tank capacity in minimum external space



Extensive running time (large battery compartment)



Solution control with automatic stop (Solenoid valve)



Brush control with automatic "delayed" stop

## High Performance



Pre-programmed working settings



SLS (Self Levelling System) Automatic brush pressure control



High quality and performance vacuum motor

PATENTED



## CT 230



### Ergonomics, User Friendly



Great manoeuvrability thanks to an optimum weight distribution



Great visibility whilst working



Designed to assure minimum noise levels



Designed for maximum comfort



Easy to use control panel



Automatic stop (by command release) in working mode



Solution tank level indicator



Battery level indicator



Solution tank discharge hose



Solution tank can be tilted



Flashing beacon



Automatic squeegee lift in reverse



Squeegee assembly and blades replacement without tools



Easy access to internal compartments

### Low Maintenance Costs



Inlet and outlet filters for maximum solution tank protection



AFS (Anti Foam System)  
Sistema antischiuma



Brush replacement without tools



Squeegee blade can be used on 4 sides before replacement



## CT 230



### Robust Construction



Tanks and surrounding body in high density polyethylene



Oil bath reduction gear box



Brush head designed to absorb harsh impact



Squeegee system designed to absorb harsh impact



Panel control switches protected against water and humidity



Technical data		CT230 BT 85	CT230 BT 105
Scrubbing width	mm	850	1050
Suction width	mm	1010	1280
Productivity (at max speed)	m <sup>2</sup> /h	5400	6825
Number of brushes		2	2
Solution tank capacity	l	205	205
Recovery tank capacity	l	225	225
Power supply	V	36V	36V
Max speed	Km/h	6.5	6.5
Weight (net)	Kg	350	377,5
Dimensions (LxWxH)	mm	1950x935x1466	1950x1155x1466



## CT 230




### Huge tank capacity in minimum external space

205-225 litre capacity tank-in-tank make this model very unique in its category.




### Pre-programmed working settings

3 independent programs allow best settings for all types of applications. Solution flow remains adjustable at any time. Each program can be fully personalized.

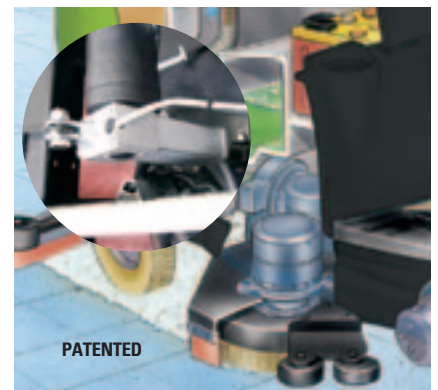

### SLS (Self Levelling System) Automatic brush pressure control

Constant brush pressure with immediate reaction. Avoids also excessive brush and actuator wear.

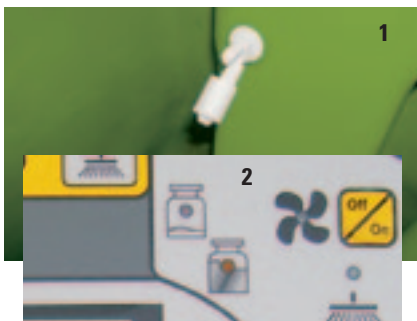

### Water level control on both tanks. Maximum protection for the vacuum motor (Water Level Sensor)

1. The vacuum motor is mounted in the highest part of the machine. A sensor shuts off the vacuum motor when the dirty water tank is full.
2. When the dirty water tank is full, the right LED comes on and the vacuum motor shuts down. The left LED indicates when the detergent solution has reached the reserve and there is enough detergent left for about two minutes.



### Extensive running time

Extremely large battery compartment allows batteries of up to 320 Ah (4,5 running time).



**IPC**